


DA-TO252-5-P114

TO252-5 (DPAK 5-6 pins) SMT ADAPTER

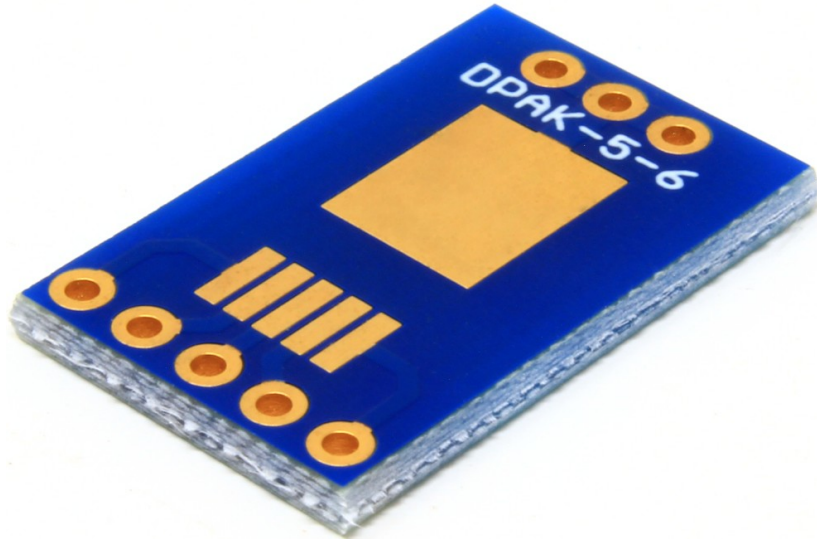

This adapter breaks out the pins of a component with a TO252-5 package (also known as DPAK with 5 or 6 pins) into a board with 0.1" (2.54mm) spaced pins.

This is a high quality PCB, with all the copper pads and contacts plated with Electroless Nickel Immersion Gold (ENIG) process, offering an excellent surface planarity and oxidation resistance.

The land pattern includes a solderable central pad that can be used to dissipate heat from a high-power integrated circuit.

Specifications	
Supported packages	TO252-5 DPAK 5-6 pins
Package body size	N/A
Component pin pitch	N/A
Board pin pitch	2.54mm (0.1")
Temperature rating	-25°C to +125°C
Material	FR4
RoHS compliant	Yes

Board and land pattern dimensions

All dimensions are in millimeters

