

5

4

3

2

1

受控 CONTROLLED DOCUMENT

| | | | | | |
|-----------|----------|-----------|----|------------------|----------|
| 编号 P/N | 40-97XXM | 版本 Rev | 02 | 日期 Rel'd Date | Jul11,11 |
|-----------|----------|-----------|----|------------------|----------|

Description: 97 Series Solder Style Panel & Cable Mount D-Sub Connectors

Part No: 40-97xxM

Application: For Cable

Crimp Tool: N/A

Impedance: N/A

Fequency Range: 0-15 MHz

Material: Housing Steel Nickel plated
Insulator PBT+Fiber-glass UL94-V0 White
Contact Cu-alloy, Gold plated

RoHS Compliance: Yes

Technical Detail: N/A

DRAWING NO.


40-97XXM

REVISIONS

| | | | | | |
|----------|--------|--|---|--|-------------|
| 01 | | OFFICIAL RELEASE | | | |
| 02-20-09 | T W | B Y | T | | |
| 02 | | CHANGE SHELL PLATING FROM YELLOW ZINC TO NICKEL; CHANGE DIMENSIONS: 3.50MAX TO 3.8REF; D DIMENSION FOR 40-9725M FROM 41.28 TO 41.10; ADD DIMENSIONS: 1.25MAX; 5.6MAX; | | | |
| 03-25-11 | J J | J J | D | | ECO-11-0055 |



| P/N | Pins | A | B | C | D |
|----------|------|-------|-------|-------|-------|
| 40-9709M | 9 | 30.80 | 24.99 | 16.92 | 19.20 |
| 40-9715M | 15 | 39.15 | 33.32 | 25.25 | 27.70 |
| 40-9725M | 25 | 53.00 | 47.04 | 38.96 | 41.10 |
| 40-9737M | 37 | 69.30 | 63.50 | 55.42 | 57.30 |

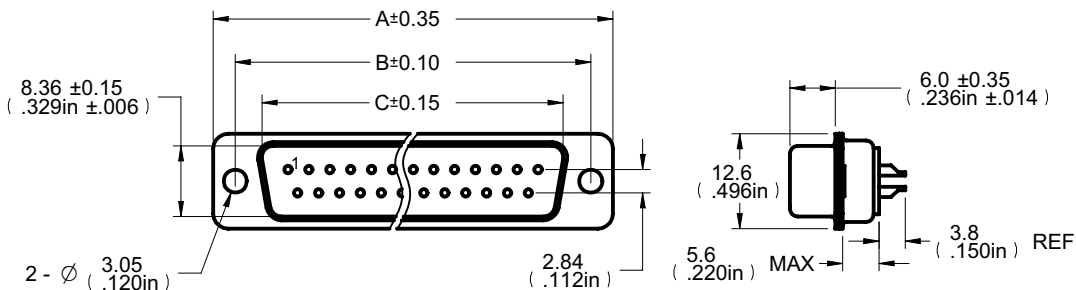

CUSTOMER COPY

| | | | |
|--------------------------------------|--------|-------------|----------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | DRAWN BY | DATE |
| DECIMALS | mm | JEAN.JIN | 03-25-11 |
| X | ± 0.5 | CHECKED BY | DATE |
| X.X | ± 0.3 | JEAN.JIN | 03-25-11 |
| X.XX | ± 0.1 | APPROVED BY | DATE |
| ANGLES | ± 0.5° | DONALD | 03-25-11 |
| | | U/M | mm |



Connectivity Solutions

TITLE
97 SERIES SOLDER STYLE PANEL &
CABLE MOUNT D-SUB CONNECTORS

SHEET
1 OF 1DRAWING NO.
40-97XXM-CUSTSIZE
A

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

5

4

3

2

1

SOLID EDGE RESSELLER.COM